

**AXLE  
COMPARISON  
(STEERED)**






**CONVENTIONAL  
(CON)**

**INDEPENDENT  
WHEEL SUSPENSION (SL2)**

**PENDLE AXLES  
(PL2)**




**MINIMUM  
DRIVING HEIGHT (LOADED)**

CON: 830 mm  
SL2: 780 mm  
PL2: 810 mm

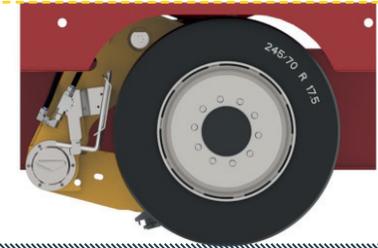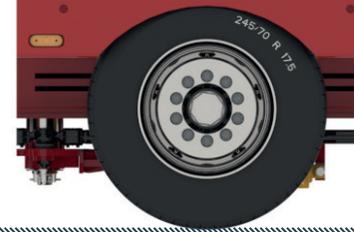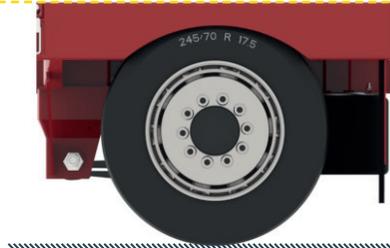

**MAXIMUM  
DRIVING HEIGHT (LOADED)**

CON: 980 mm  
SL2: 1140 mm  
PL2: 1410 mm

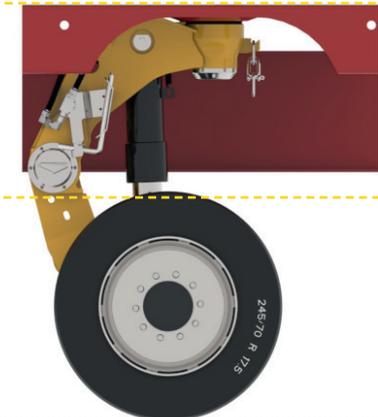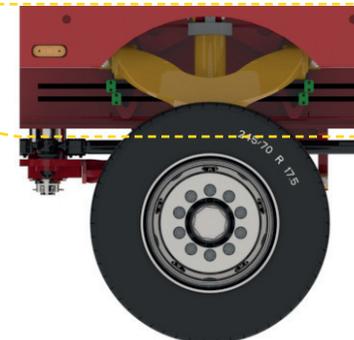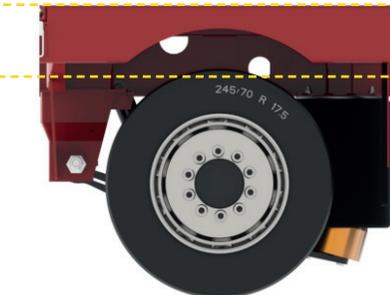

**NORMAL  
DRIVING HEIGHT (LOADED)**

CON: 870 mm  
SL2: 850 mm  
PL2: 870 mm

**ALIGNMENT EFFECTED  
BY DRIVING HEIGHT**

Effectted

No effect

No effect

**MAX. STEERING ANGLE**

43°

59°

70°

**TYRE EXCHANGE**

Easy

Easy

Hard

**MAINTENANCE COST**

Low

Low/medium

Medium